



Labelling Line For two sides applications



GENERAL FEATURES

- ❖ Automatic labeller for applying two labels or more on cylindrical, flat and oval products at the same time.
- ❖ The machine consists in a conveyor and two heads.
- ❖ In case of wraparound label application a side conveyor is installed.
- ❖ It is also possible to install an hot or dry overprinting unit for marking alphanumerical variable data.
- ❖ The loading and unloading of products can done manually, or on a rotary table Ø 800 or 1000 mm, or alternatively directly from an existing production line.


TECHNICAL FEATURES

- ❖ Products shape:
 - Flat, round, oval
- ❖ Machine sizes :
 - Length 2000 mm
 - Width 1200 mm
 - Height 1500 mm
- ❖ Conveyor motor :
 - 0.57 Kw AC
- ❖ Speed:
 - 20mt/min to 40mt / min
 - Depending of the model
- ❖ Power :
 - 230V V AC
- ❖ Label reel size :
 - Diameter external max : 250 mm to 350 mm
 - Diameter internal min : 40 mm
 - Depending of the model
 - Other sizes on request

New touch screen control box, that allows the setting of useful information for the correct application of labels

Superior stabilizing counteroller
 To ensure the product stability during the labelling

No motorized controller

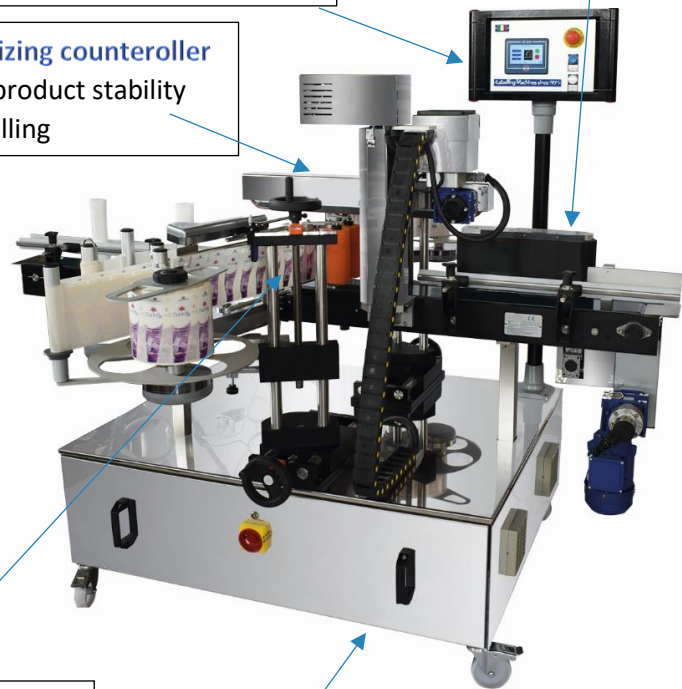

Photocell, for opaque or micro for transparent label

Stainless steel base, containing the electrical panel of the machine

